

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

I, SALLY LESLEY HEDLEY, B.A., M.I.L., M.I.T.I., declare

1. That I am a citizen of the United Kingdom of Great Britain and Northern Ireland, residing at 29 Parkholme Road, London E8 3AG.
2. That I am well acquainted with the German and English languages.
3. That the attached is a true translation into the English language of the Request and Specification as originally filed of International Patent Application No. PCT/EP99/09240, save that the English version of the title has been taken from the cover page of the corresponding International Publication No. WO 00/34388.
4. That all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such wilful false statements may jeopardise the validity of the patent application in the United States of America or any patent issuing thereon.

DECLARED THIS 10th DAY OF MAY 2001

Sally Hedley

SALLY HEDLEY

PCT

REQUEST

The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty.

For receiving Office use only

PCT/EP 99/09240	
International Application No.	
29 NOV 1999	(29.11.99)
International Filing Date	
EUROPEAN PATENT OFFICE PCT INTERNATIONAL APPLICATION	
Name of receiving Office and "PCT International Application"	
Applicant's or agent's file reference (if desired) (12 characters maximum) HE/K-21888/A	

Box No. I TITLE OF INVENTION

Hydrophobic epoxide resin system

Box No. II APPLICANT

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

Ciba Specialty Chemicals Holding Inc.
Klybeckstrasse 141
4057 Basle
CH

☐ This person is also inventor

Telephone No. +41 61 636 11 11

Facsimile No. +41 61 636 79 76

Teleprinter No.

State (that is, country) of nationality: CH

State (that is, country) of residence: CH

This person is applicant for the purposes of: ☐ all designated States ☒ all designated States except the United States of America ☐ the United States of America only ☐ the States indicated in the Supplemental Box

Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

BEISELE, Christian
Lindenweg 36
79424 Auggen
DE

This person is:

☐ applicant only
☒ applicant and inventor
☐ inventor only (If this check-box is marked, do not fill in below.)

State (that is, country) of nationality: CH

State (that is, country) of residence: DE

This person is applicant for the purposes of: ☐ all designated States ☐ all designated States except the United States of America ☒ the United States of America only ☐ the States indicated in the Supplemental Box

☒ Further applicants and/or (further) inventors are indicated on a continuation sheet.

Box No. IV AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CORRESPONDENCE

The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as: ☐ agent ☒ common representative

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)

Ciba Specialty Chemicals Holding Inc.
Patent Department
Klybeckstrasse 141
4057 Basle
CH

Telephone No. +41 61 636 11 11

Facsimile No. +41 61 636 79 76

Teleprinter No.

☐ Address for correspondence: Mark this check-box where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent.

Continuation of Box No. III

FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)

If none of the following sub-boxes is used, this sheet is not to be included in the request.

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

KAINMÜLLER, Thomas
Schauinslandstrasse 2
79576 Weil am Rhein
DE

This person is:

- ☐ applicant only
☒ applicant and inventor
☐ inventor only (If this check-box is marked, do not fill in below.)

State (that is, country) of nationality:

AT

State (that is, country) of residence:

DE

This person is applicant for the purposes of:

☐

all designated States

☐

all designated States except the United States of America

☒

the United States of America only

☐

the States indicated in the Supplemental Box

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

TANG, Qian
Stallenrain 1
4104 Oberwil
CH

This person is:

- ☐ applicant only
☒ applicant and inventor
☐ inventor only (If this check-box is marked, do not fill in below.)

State (that is, country) of nationality:

CN

State (that is, country) of residence:

CH

This person is applicant for the purposes of:

☐

all designated States

☐

all designated States except the United States of America

☒

the United States of America only

☐

the States indicated in the Supplemental Box

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

This person is:

- ☐ applicant only
☐ applicant and inventor
☐ inventor only (If this check-box is marked, do not fill in below.)

State (that is, country) of nationality:

State (that is, country) of residence:

This person is applicant for the purposes of:

☐

all designated States

☐

all designated States except the United States of America

☐

the United States of America only

☐

the States indicated in the Supplemental Box

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

This person is:

- ☐ applicant only
☐ applicant and inventor
☐ inventor only (If this check-box is marked, do not fill in below.)

State (that is, country) of nationality:

State (that is, country) of residence:

This person is applicant for the purposes of:

☐

all designated States

☐

all designated States except the United States of America

☐

the United States of America only

☐

the States indicated in the Supplemental Box

☐

Further applicants and/or (further) inventors are indicated on another continuation sheet.

Box No. V DESIGNATION OF STATES

The following designations are hereby made under Rule 4.9(a) (mark the applicable check-boxes; at least one must be marked):

Regional Patent

- ☒ AP ARIPO Patent: GH Ghana, GM Gambia, KE Kenya, LS Lesotho, MW Malawi, SD Sudan, SL Sierra Leone, SZ Swaziland, TZ United Republic of Tanzania, UG Uganda, ZW Zimbabwe, and any other State which is a Contracting State of the Harare Protocol and of the PCT
- ☒ EA Eurasian Patent: AM Armenia, AZ Azerbaijan, BY Belarus, KG Kyrgyzstan, KZ Kazakstan, MD Republic of Moldova, RU Russian Federation, TJ Tajikistan, TM Turkmenistan, and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT
- ☒ EP European Patent: AT Austria, BE Belgium, CH and LI Switzerland and Liechtenstein, CY Cyprus, DE Germany, DK Denmark, ES Spain, FI Finland, FR France, GB United Kingdom, GR Greece, IE Ireland, IT Italy, LU Luxembourg, MC Monaco, NL Netherlands, PT Portugal, SE Sweden, and any other State which is a Contracting State of the European Patent Convention and of the PCT
- ☒ OA OAPI Patent: BF Burkina Faso, BJ Benin, CF Central African Republic, CG Congo, CI Côte d'Ivoire, CM Cameroon, GA Gabon, GN Guinea, GW Guinea-Bissau, ML Mali, MR Mauritania, NE Niger, SN Senegal, TD Chad, TG Togo, and any other State which is a member State of OAPI and a Contracting State of the PCT (if other kind of protection or treatment desired, specify on dotted line)

National Patent (if other kind of protection or treatment desired, specify on dotted line):

- | | | |
|---|--|--|
| <input checked="" type="checkbox"/> AE United Arab Emirates..... | <input checked="" type="checkbox"/> LR Liberia..... | |
| <input checked="" type="checkbox"/> AL Albania..... | <input checked="" type="checkbox"/> LS Lesotho..... | |
| <input checked="" type="checkbox"/> AM Armenia..... | <input checked="" type="checkbox"/> LT Lithuania..... | |
| <input checked="" type="checkbox"/> AT Austria..... | <input checked="" type="checkbox"/> LU Luxembourg..... | |
| <input checked="" type="checkbox"/> AU Australia..... | <input checked="" type="checkbox"/> LV Latvia..... | |
| <input checked="" type="checkbox"/> AZ Azerbaijan..... | <input checked="" type="checkbox"/> MD Republic of Moldova..... | |
| <input checked="" type="checkbox"/> BA Bosnia and Herzegovina..... | <input checked="" type="checkbox"/> MG Madagascar..... | |
| <input checked="" type="checkbox"/> BB Barbados..... | <input checked="" type="checkbox"/> MK The former Yugoslav Republic of Macedonia..... | |
| <input checked="" type="checkbox"/> BG Bulgaria..... | | |
| <input checked="" type="checkbox"/> BR Brazil..... | <input checked="" type="checkbox"/> MN Mongolia..... | |
| <input checked="" type="checkbox"/> BY Belarus..... | <input checked="" type="checkbox"/> MW Malawi..... | |
| <input checked="" type="checkbox"/> CA Canada..... | <input checked="" type="checkbox"/> MX Mexico..... | |
| <input checked="" type="checkbox"/> CH und LI Switzerland and Liechtenstein..... | <input checked="" type="checkbox"/> NO Norway..... | |
| <input checked="" type="checkbox"/> CN China..... | <input checked="" type="checkbox"/> NZ New Zealand..... | |
| <input checked="" type="checkbox"/> CU Cuba..... | <input checked="" type="checkbox"/> PL Poland..... | |
| <input checked="" type="checkbox"/> CZ Czech Republic..... | <input checked="" type="checkbox"/> PT Portugal..... | |
| <input checked="" type="checkbox"/> DE Germany..... | <input checked="" type="checkbox"/> RO Romania..... | |
| <input checked="" type="checkbox"/> DK Denmark..... | <input checked="" type="checkbox"/> RU Russian Federation..... | |
| <input checked="" type="checkbox"/> EE Estonia..... | <input checked="" type="checkbox"/> SD Sudan..... | |
| <input checked="" type="checkbox"/> ES Spain..... | <input checked="" type="checkbox"/> SE Sweden..... | |
| <input checked="" type="checkbox"/> FI Finland..... | <input checked="" type="checkbox"/> SG Singapore..... | |
| <input checked="" type="checkbox"/> GB United Kingdom..... | <input checked="" type="checkbox"/> SI Slovenia..... | |
| <input checked="" type="checkbox"/> GD Grenada..... | <input checked="" type="checkbox"/> SK Slovakia..... | |
| <input checked="" type="checkbox"/> GE Georgia..... | <input checked="" type="checkbox"/> SL Sierra Leone..... | |
| <input checked="" type="checkbox"/> GH Ghana..... | <input checked="" type="checkbox"/> TJ Tajikistan..... | |
| <input checked="" type="checkbox"/> GM Gambia..... | <input checked="" type="checkbox"/> TM Turkmenistan..... | |
| <input checked="" type="checkbox"/> HR Croatia..... | <input checked="" type="checkbox"/> TR Turkey..... | |
| <input checked="" type="checkbox"/> HU Hungary..... | <input checked="" type="checkbox"/> TT Trinidad and Tobago..... | |
| <input checked="" type="checkbox"/> ID Indonesia..... | <input checked="" type="checkbox"/> UA Ukraine..... | |
| <input checked="" type="checkbox"/> IL Israel..... | <input checked="" type="checkbox"/> UG Uganda..... | |
| <input checked="" type="checkbox"/> IN India..... | <input checked="" type="checkbox"/> US United States of America..... | |
| <input checked="" type="checkbox"/> IS Iceland..... | | |
| <input checked="" type="checkbox"/> JP Japan..... | <input checked="" type="checkbox"/> UZ Uzbekistan..... | |
| <input checked="" type="checkbox"/> KE Kenya..... | <input checked="" type="checkbox"/> VN Viet Nam..... | |
| <input checked="" type="checkbox"/> KG Kyrgyzstan..... | <input checked="" type="checkbox"/> YU Yugoslavia..... | |
| <input checked="" type="checkbox"/> KP Democratic People's Republic of Korea..... | <input checked="" type="checkbox"/> ZA South Africa..... | |
| | <input checked="" type="checkbox"/> ZW Zimbabwe..... | |
| <input checked="" type="checkbox"/> KR Republic of Korea..... | Check-boxes reserved for designating States (for the purposes of a national patent) which have become party to the PCT after issuance of this sheet: | |
| <input checked="" type="checkbox"/> KZ Kazakstan..... | <input checked="" type="checkbox"/> CR Costa Rica..... | |
| <input checked="" type="checkbox"/> LC Saint Lucia..... | <input checked="" type="checkbox"/> DM Dominica..... | |
| <input checked="" type="checkbox"/> LK Sri Lanka..... | <input checked="" type="checkbox"/> TZ United Republic of Tanzania..... | |
| | <input checked="" type="checkbox"/> MA Morocco..... | |

Precautionary Designation Statement: In addition to the designations made above, the applicant also makes under Rule 4.9(b) all other designations which would be permitted under the PCT except any designation(s) indicated in the Supplemental Box as being excluded from the scope of this statement. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit. (Confirmation of a designation consists of the filing of a notice specifying that designation and the payment of the designation and confirmation fees. Confirmation must reach the receiving Office within the 15-month time limit.)

Box No. VI PRIORITY CLAIM		<input type="checkbox"/> Further priority claims are indicated in the Supplemental Box		
Filing Date of earlier application (day/month/year)	Number of earlier application	Where earlier application is:		
		national application: country	regional application: * regional Office	international application: receiving Office
item (1) 09 December 1998 (09.12.98)	2441/98	CH		
item (2)				
item (3)				

☐ The receiving Office is requested to prepare and transmit to the International Bureau a certified copy of the earlier application(s) (only if the earlier application was filed with the Office which for the purposes of the present international application is the receiving Office) identified above as item(s): _____

* Where the earlier application is an ARIPO application, it is mandatory to indicate in the Supplemental Box at least one country party to the Paris Convention for the Protection of Industrial Property for which that earlier application was filed (Rule 4.10(b)(ii)). See Supplemental Box.

Box No. VII INTERNATIONAL SEARCHING AUTHORITY

Choice of International Searching Authority (ISA)
(If two or more International Searching Authorities are competent to carry out the international search, indicate the Authority chosen; the two-letter code may be used):

ISA/

Request to use results of earlier search; reference to that search (if an earlier search has been carried out by or requested from the International Searching Authority):

Date (day/month/year)

Number

Country (or regional Office)

Box No. VIII CHECK LIST; LANGUAGE OF FILING

This international application contains the following number of sheets:

request : 4
description (excluding sequence listing part) : 21
claims : 3
abstract : 1
drawings : —
sequence listing part of description : —
Total number of sheets : 29

This international application is accompanied by the item(s) marked below:

1. ☒ fee calculation sheet
2. ☒ separate signed power of attorney
3. ☐ copy of general power of attorney; reference number, if any:
4. ☐ statement explaining lack of signature
5. ☒ priority document(s) identified in Box No VI as item(s): (1)
6. ☐ translation of international application into (language):
7. ☐ separate indications concerning deposited microorganism or other biological material
8. ☐ nucleotide and/or amino acid sequence listing in computer readable form
9. ☐ other (specify):

Figure of the drawings which should accompany the abstract: —

Language of filing of the international application:

German

Box No. IX SIGNATURE OF APPLICANT OR AGENT

Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the request)

Ciba Specialty Chemicals Holding Inc
(signature)

Verena Spengler
Patent Administrator

25.11.1999

For receiving Office use only		2. Drawings: <input type="checkbox"/> received <input type="checkbox"/> not received:
1. Date of actual receipt of the purported international application:	29 NOV 1999 (29.11.99)	
3. Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application:		
4. Date of timely receipt of the required corrections under PCT Article 11(2):		
5. International Searching Authority specified by the applicant: ISA/	6. <input type="checkbox"/> Transmittal of search copy delayed until search fee is paid	

For International Bureau use only

Date of receipt of the record copy by the International Bureau:

Hydrophobic epoxide resin system

The present invention relates to a composition comprising an epoxy resin, various polysiloxanes and fluorinated compounds, to crosslinked products obtainable by curing such a composition and to the use of such a composition as electrical insulating material.

Epoxy resins are frequently used as electrical insulating material on account of their good mechanical properties and their high specific resistance. Cycloaliphatic epoxy resins are especially suitable for outdoor applications because of their high resistance to weathering, but the problem arises, especially in regions having high levels of precipitation and air pollution, that a conductive dirt/water layer can form on the surface of the insulator, which leads to leakage currents and arcing and may have consequences ranging from damage to the insulator up to total failure. Even only slightly soiled epoxy-based insulators can undergo a rise in surface conductivity if the surface becomes eroded by weathering in the course of time and the water is better able to wet the resulting roughened layer.

As disclosed in US Patent 3 926 885, epoxy resins can be provided with hydrophobic properties by the addition of polysiloxane/polyether copolymers and OH-terminated polysiloxanes, but the adhesion of the resulting material to metal is not sufficient for all applications.

JP-A 2-305454 describes epoxy resin mixtures having a high degree of stability towards moisture which, in addition to comprising an epoxy novolak and a phenolic resin, also comprise small amounts of a cyclic dimethylsiloxane. Although, in those compositions, the corrosion caused by binding of water on the surface is largely prevented, a hydrophobicity effect sufficient for use as an insulator is not achieved with such systems.

WO 98/32138 describes a resin system suitable as electrical insulating material that is based on curable mixtures of epoxy resins and specific silicone oligomers having terminal glycidyl groups. As a result of the curing, the silicone oligomers become part of the crosslinked structure that is formed, so that known properties of silicones, such as hydrophobicity and good resistance to weathering, can be imparted to the cured material. A disadvantage is the use of expensive commercially available silicone oligomers and a poor hydrophobicity transfer effect.

It has now been found that compositions comprising an epoxy resin, at least two specific polysiloxanes and a non-ionic, fluoroaliphatic surface-active reagent are able to yield storage-stable emulsions that in the fully cured state have a pronounced hydrophobicity transfer effect and recovery effect.

The present invention relates to a composition comprising

- (a) an epoxy resin,
- (b) an OH-terminated polysiloxane,
- (c) a cyclic polysiloxane and
- (d) a non-ionic, fluoroaliphatic surface-active reagent.

The amounts of components (a) to (c) in the compositions according to the invention can vary within wide limits.

Preference is given to compositions comprising,

based on the total composition (a), (b), (c) and (d),

from 77.0 to 97.99 % by weight, especially from 86.0 to 96.95 % by weight, component (a),

from 1.0 to 10.0 % by weight, especially from 2.0 to 6.0 % by weight, component (b),

from 1.0 to 10.0 % by weight, especially from 1.0 to 5.0 % by weight, component (c) and

from 0.01 to 3.0 % by weight, especially from 0.05 to 3.0 % by weight, component (d),

the sum of components (a), (b), (c) and (d) being 100 % by weight.

As component (a) of the compositions according to the invention there are suitable any type of epoxide that contains at least one glycidyl or β -methylglycidyl group, a linear alkylene oxide group or a cycloalkylene oxide group.

Examples of suitable epoxy resins are polyglycidyl and poly(β -methylglycidyl) ethers obtainable by reaction of a compound containing at least two free alcoholic and/or phenolic hydroxyl groups per molecule with epichlorohydrin or β -methylepichlorohydrin under alkaline conditions, or alternatively in the presence of an acid catalyst with subsequent alkali treatment.

Suitable starting compounds for the preparation of such glycidyl or β -methylglycidyl ethers are, for example, acyclic alcohols, such as ethylene glycol, diethylene glycol and higher poly(oxyethylene) glycols, propane-1,2-diol and poly(oxypropylene) glycols, propane-1,3-diol,

butane-1,4-diol, poly(oxytetramethylene) glycols, pentane-1,5-diol, hexane-1,6-diol, hexane-2,4,6-triol, glycerol, 1,1,1-trimethylolpropane, pentaerythritol or sorbitol, cycloaliphatic alcohols, such as resorcitol, quinitol, bis(4-hydroxycyclohexyl)methane, 2,2-bis(4-hydroxycyclohexyl)propane and 1,1-bis(hydroxymethyl)cyclohex-3-ene, and alcohols having aromatic nuclei, such as N,N-bis(2-hydroxyethyl)aniline and p,p'-bis(2-hydroxyethylamino)diphenylmethane.

Further suitable dihydroxy compounds for the preparation of glycidyl or β -methylglycidyl ethers are mononuclear phenols, such as resorcinol and hydroquinone, polynuclear phenols, such as bis(4-hydroxyphenyl)methane, 4,4-dihydroxydiphenyl, bis(4-hydroxyphenyl)sulfone, 1,1,2,2-tetrakis(4-hydroxyphenyl)ethane, 2,2-bis(4-hydroxyphenyl)propane (bisphenol A) and 2,2-bis(3,5-dibromo-4-hydroxyphenyl)propane, and novolaks, for example phenol and cresol novolaks.

Polyglycidyl and poly(β -methylglycidyl) esters are obtainable by reaction of a compound containing two or more carboxylic acid groups per molecule with epichlorohydrin, glycerol dichlorohydrin or β -methylepichlorohydrin in the presence of alkali. Such polyglycidyl esters can be derived from aliphatic polycarboxylic acids, e.g. oxalic acid, succinic acid, glutaric acid, adipic acid, pimelic acid, suberic acid, azelaic acid, sebacic acid or dimerised or trimerised linoleic acid, from cycloaliphatic polycarboxylic acids, such as tetrahydrophthalic acid, 4-methyltetrahydrophthalic acid, hexahydrophthalic acid and 4-methylhexahydrophthalic acid, and from aromatic polycarboxylic acids, such as phthalic acid, isophthalic acid and terephthalic acid.

Further epoxides suitable as component (a) are poly(N-glycidyl) compounds, for example the products obtainable by dehydrochlorination of the reaction products of epichlorohydrin and amines containing at least two amino hydrogen atoms, such as aniline, n-butylamine, bis(4-aminophenyl)methane and bis(4-methyl-aminophenyl)methane. Also included are triglycidyl isocyanurate as well as N,N'-diglycidyl derivatives of cyclic alkyleneureas, such as ethyleneurea and 1,3-propyleneurea and hydantoins, such as 5,5-dimethylhydantoin.

Poly(S-glycidyl) compounds, for example the di-S-glycidyl derivatives of dithiols, such as ethane-1,2-dithiol and bis(4-mercaptomethylphenyl) ether, are likewise suitable.

Preferably the compositions comprise as component (a) a cycloaliphatic epoxy resin or an epoxidation product of a natural unsaturated oil or a derivative thereof.

The term "cycloaliphatic epoxy resin" in the context of this invention denotes any epoxy resin having cycloaliphatic structural units, that is to say it includes both cycloaliphatic glycidyl compounds and β -methylglycidyl compounds as well as epoxy resins based on cycloalkylene oxides.

Suitable cycloaliphatic glycidyl compounds and β -methylglycidyl compounds are the glycidyl esters and β -methylglycidyl esters of cycloaliphatic polycarboxylic acids, such as tetrahydrophthalic acid, 4-methyltetrahydrophthalic acid, hexahydrophthalic acid, 3-methylhexahydrophthalic acid and 4-methylhexahydrophthalic acid.

Further suitable cycloaliphatic epoxy resins are the diglycidyl ethers and β -methylglycidyl ethers of cycloaliphatic alcohols, such as 1,2-dihydroxycyclohexane, 1,3-dihydroxycyclohexane and 1,4-dihydroxycyclohexane, 1,4-cyclohexanedimethanol, 1,1-bis(hydroxymethyl)-cyclohex-3-ene, bis(4-hydroxycyclohexyl)methane, 2,2-bis(4-hydroxycyclohexyl)propane and bis(4-hydroxycyclohexyl)sulfone.

Examples of epoxy resins having cycloalkylene oxide structures are bis(2,3-epoxycyclopentyl) ether, 2,3-epoxycyclopentylglycidyl ether, 1,2-bis(2,3-epoxycyclopentyl)ethane, vinyl cyclohexene dioxide, 3,4-epoxycyclohexylmethyl 3',4'-epoxycyclohexanecarboxylate, 3,4-epoxy-6-methylcyclohexylmethyl 3',4'-epoxy-6'-methylcyclohexanecarboxylate, bis(3,4-epoxycyclohexylmethyl) adipate and bis(3,4-epoxy-6-methylcyclohexylmethyl) adipate.

Preferred cycloaliphatic epoxy resins are bis(4-hydroxycyclohexyl)methanediglycidyl ether, 2,2-bis(4-hydroxycyclohexyl)propanediglycidyl ether, tetrahydrophthalic acid diglycidyl ester, 4-methyltetrahydrophthalic acid diglycidyl ester, 4-methylhexahydrophthalic acid diglycidyl ester, and especially hexahydrophthalic acid diglycidyl ester and 3,4-epoxycyclohexylmethyl 3',4'-epoxycyclohexanecarboxylate.

As component (a) it is also possible to use in the compositions according to the invention epoxidation products of unsaturated fatty acid esters. It is preferable to use epoxy-containing compounds derived from mono- and poly-fatty acids having from 12 to 22 carbon atoms and an iodine number of from 30 to 400, for example lauroleic acid, myristoleic acid,

palmitoleic acid, oleic acid, gadoleic acid, erucic acid, ricinoleic acid, linoleic acid, linolenic acid, elaidic acid, licanic acid, arachidonic acid and clupanodonic acid.

For example, there are suitable the epoxidation products of soybean oil, linseed oil, perilla oil, tung oil, oiticica oil, safflower oil, poppyseed oil, hemp oil, cottonseed oil, sunflower oil, rapeseed oil, polyunsaturated triglycerides, triglycerides from euphorbia plants, groundnut oil, olive oil, olive kernel oil, almond oil, kapok oil, hazelnut oil, apricot kernel oil, beechnut oil, lupin oil, maize oil, sesame oil, grapeseed oil, lallemantia oil, castor oil, herring oil, sardine oil, menhaden oil, whale oil, tall oil and derivatives thereof.

Also suitable are higher unsaturated derivatives that can be obtained by subsequent dehydrogenation reactions of those oils.

The olefinic double bonds of the unsaturated fatty acid radicals of the above-mentioned compounds can be epoxidised in accordance with known methods, for example by reaction with hydrogen peroxide, optionally in the presence of a catalyst, an alkyl hydroperoxide or a per acid, for example performic acid or peracetic acid.


Within the scope of the invention, both the fully epoxidised oils and the partially epoxidised derivatives that still contain free double bonds can be used as component (a).

Especially preferred as component (a) are epoxidised soybean oil and epoxidised linseed oil.

The OH-terminated polysiloxanes in accordance with component (b) can be prepared according to known methods, for example by hydrolysis of the corresponding organochlorosilanes and subsequent polycondensation of the silanols, there generally being formed polysiloxane mixtures having molecular masses of from 1000 to 150 000 g/mol. A number of such OH-terminated polysiloxanes are commercially available.

In the compositions according to the invention it is preferable to use liquid polysiloxanes.

There is preferably used a polysiloxane of formula I

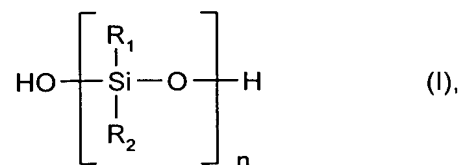

wherein R_1 and R_2 are each independently of the other $\text{C}_1\text{-C}_{18}$ alkyl, $\text{C}_5\text{-C}_{14}$ aryl or $\text{C}_6\text{-C}_{24}$ -aralkyl and n is an average value of from 3 to 60, especially from 4 to 20.

Alkyl includes, for example, methyl, ethyl, isopropyl, n-propyl, n-butyl, isobutyl, sec-butyl, tert-butyl and the various isomeric pentyl, hexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl, tridecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, octadecyl, nonadecyl and eicosyl groups.

Aryl as R_1 or R_2 contains preferably from 6 to 14 carbon atoms and may be, for example, phenyl, tolyl, pentalinyl, indenyl, naphthyl, azulinyll and anthryl.


Aralkyl as R_1 or R_2 contains preferably from 7 to 12 carbon atoms and especially from 7 to 10 carbon atoms. It may be, for example, benzyl, phenylethyl, 3-phenylpropyl, α -methylbenzyl, 4-phenylbutyl or α,α -dimethylbenzyl.

Special preference is given to polysiloxanes of formula I wherein R_1 and R_2 are each independently of the other methyl, ethyl or phenyl.

Especially preferred as component (b) are polysiloxanes of formula I wherein R_1 and R_2 are methyl and $n = 4$ to 20.

The cyclic polysiloxanes in accordance with component (c) are likewise known to the person skilled in the art and can be prepared according to known methods.

There is preferably used as component (c) a cyclic polysiloxane of formula II

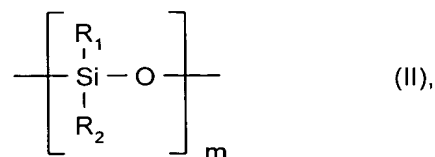

wherein R_1 and R_2 are each independently of the other $\text{C}_1\text{-C}_{18}$ alkyl, $\text{C}_5\text{-C}_{14}$ aryl or $\text{C}_6\text{-C}_{24}$ -aralkyl and m is an integer from 3 to 12.

Alkyl, aryl and aralkyl in formula (II) have the same definitions as the corresponding groups according to formula (I).

Preferred as component (c) are cyclic polysiloxanes of formula II wherein R_1 and R_2 are each independently of the other methyl, ethyl or phenyl and m is an integer from 3 to 8.


Very especially, R_1 and R_2 are methyl and m is an integer from 6 to 8.

As described in J. Am. Chem. Soc. 68, 358 (1946), such cyclic polysiloxanes can be isolated from the product mixture formed on hydrolysis of the corresponding dialkyl-, diaryl- or diaralkyl-dichlorosilanes.

Especially preferred as component (c) are the commercially available compounds octamethylcyclotetrasiloxane ($m = 4$), decamethylcyclopentasiloxane ($m = 5$) and especially dodecamethylcyclohexasiloxane ($m = 6$) and also hydrolysates of dimethyldichlorosilane, especially undistilled hydrolysates, since they have higher contents of cyclic polysiloxanes having the preferred ring size $m = 6$ to 8, and hence in addition to dodecamethylcyclohexasiloxane also tetradecamethylcycloheptasiloxane ($m = 7$) and hexadecamethylcyclooctasiloxane ($m = 8$).

As surface-active reagent in the form of component (d) of the compositions according to the invention there are suitable derivatives of non-ionic, perfluorinated polyalkylenes, such as perfluorinated polyoxyalkylenes. Preference is given to compounds of a combination of a perfluorinated aliphatic alkyl unit R_f with a hydrocarbon unit R , in which the latter contains at least one, preferably oxygen-containing, mono- or di-valent polar functional group, e.g. $-OH$, $-COOH$, $-COOR$, $-COO-$, $-CO-$, $-O-$.

Suitable compounds are alkoxylated, especially ethoxylated, perfluorinated fatty acid derivatives, for example:



or



wherein $m = 1$ to 200, R_f is a linear or branched perfluorinated alkyl having from 2 to 22 carbon atoms and $R = H$, C_1 - C_6 alkyl or R_f .

It is preferable to use compounds of formula (III) or (IV) in which the molecular mass according to the theoretical empirical formula is only from 200 to 10 000, especially from 300 to 8000.

Preferred compounds are, for example, $F_3C-(CF_2)_5-(CH_2CH_2O)-H = 1,1,2,2$ -tetrahydro-perfluorooctanol (corresponding to formula (IV), wherein R_f = perfluorinated n-hexyl, $m = 1$ and $R = H$) or $R_f-COO-(CH_2CH_2O)_m-R$, wherein R_f is a linear perfluorinated alkyl having from 16 to 18 carbon atoms, $m = 110$ -130 and $R = H$.

Some of those compounds are commercially obtainable from a number of sources, e.g. as ZONYL[®] Fluorochemical Intermediates (DuPont), e.g. ZONYL[®] BA-L and BA Fluoro-alcohols, or FLUORAD[®] Fluorosurfactants (3M), e.g. FLUORAD[®] FC-431. Further surface-active compounds suitable for use according to the invention can be found in the technical bulletins of the manufacturers mentioned, for example "Technical Information" 233592B (1/94) relating to ZONYL[®] Fluorochemical Intermediates (DuPont).

One or more compounds of each component (a) to (d) can be used in the compositions according to the invention.

The compositions according to the invention can be cured in principle by cationic polymerisation of the epoxy resin system using an initiator system or using any customary epoxy hardener, but it is preferable to use anhydride hardeners.

The invention therefore relates also to a composition comprising the above-mentioned components (a) to (d) and additionally as component (e) a polycarboxylic anhydride.

Such an anhydride may be a linear aliphatic polymeric anhydride, for example polysebacic polyanhydride or polyazelaic polyanhydride, or a cyclic carboxylic anhydride.

Cyclic carboxylic anhydrides are especially preferred.

Examples of cyclic carboxylic anhydrides are:

succinic anhydride, citraconic anhydride, itaconic anhydride, alkenyl-substituted succinic anhydrides, dodecenylsuccinic anhydride, maleic anhydride and tricarballic anhydride, a

maleic anhydride adduct with cyclopentadiene or methylcyclopentadiene, a linoleic acid adduct with maleic anhydride, alkylated endoalkylenetetrahydrophthalic anhydrides, methyltetrahydrophthalic anhydride and tetrahydrophthalic anhydride, the isomeric mixtures of the two latter compounds being especially suitable. Especially preferred are hexahydrophthalic anhydride and methylhexahydrophthalic anhydride.

Further examples of cyclic carboxylic anhydrides are aromatic anhydrides, for example pyromellitic dianhydride, trimellitic anhydride and phthalic anhydride.

It is also possible to use chlorinated or brominated anhydrides, e.g. tetrachlorophthalic anhydride, tetrabromophthalic anhydride, dichloromaleic anhydride and chlorendic anhydride.

The compositions according to the invention can optionally additionally comprise a curing accelerator (f). Suitable accelerators are known to the person skilled in the art. Examples that may be mentioned are:

complexes of amines, especially tertiary amines, with boron trichloride or boron trifluoride;
tertiary amines, such as benzyldimethylamine;
urea derivatives, such as N-4-chlorophenyl-N',N'-dimethylurea (monuron);
unsubstituted or substituted imidazoles, such as imidazole or 2-phenylimidazole.

Preferred accelerators are tertiary amines, especially benzyldimethylamine, and imidazoles (e.g. 1-methylimidazole) for the above-mentioned compositions that comprise epoxidised oils.

The components (e) and (f) are used in the customary effective amounts, that is to say amounts sufficient for curing the compositions according to the invention. The ratio of components (a) and (e) and optionally (f) depends upon the nature of the compounds used, the rate of curing required and the properties desired in the end product and can readily be determined by the person skilled in the art. Generally, from 0.4 to 1.6 equivalents, preferably from 0.8 to 1.2 equivalents, of anhydride groups per epoxy equivalent are used.

The resin mixture (a) to (d) and the hardener component (e), optionally together with the accelerator (f), are generally stored separately and mixed together only shortly before

application. If the resin mixture (a) to (d) is to be kept in interim storage prior to curing, the resin mixture (a) to (d) requires an additional auxiliary as an optional component (g) in order that the mixture, which forms an emulsion, can be maintained in storable form. As such a stabilising auxiliary there may be used emulsifiers (surface-active and interfacially active compounds) and thickeners (for example silicic acids, bentonites, dibenzylidenesorbitol etc.). Such auxiliaries and their use are well known to the person skilled in the art.

Of the auxiliaries mentioned, the use of highly dispersed silicic acid is preferred. Highly dispersed, hydrophilic, untreated silicic acids are especially suitable. They are commercially available, for example in the form of Aerosil®. The effective amounts of silicic acid are in the range of from 0.01 to 3.5 % by weight, preferably from 0.05 to 3.0 % by weight, based on the sum of components (a) to (d), and the average size of the primary particles is advantageously about 12 nm.

The invention therefore relates also to storage-stable compositions obtainable by the addition of stabilising auxiliaries, such as emulsifiers and thickeners. Instead of hardener component (e), optionally together with an accelerator (f), the resin mixture (a) to (d) may comprise as component (e) an initiator system for the cationic polymerisation of the epoxy resin.

As initiator system for the cationic polymerisation of the epoxy resins there are used, for example, thermally activatable initiators, such as thermally activatable onium salts, oxonium salts, iodonium salts, sulfonium salts, phosphonium salts or quaternary ammonium salts that do not contain nucleophilic anions. Such initiators and their use are known. For example, US Patent 4 336 363, EP-A-0 379 464 and EP-A-0 580 552 disclose specific sulfonium salts as curing agents for epoxy resins. US Patent 4 058 401, in addition to describing specific sulfonium salts, also describes the corresponding salts of tellurium and selenium.

Quaternary ammonium salts as thermally activatable initiators are disclosed, for example, in EP-A-0 066 543 and in EP-A-0 673 104. They are salts of aromatic-heterocyclic nitrogen bases with non-nucleophilic, for example complex, halide anions, such as BF_4^- , PF_6^- , SbF_6^- , $\text{SbF}_5(\text{OH})^-$ and AsF_6^- .

As quaternary ammonium salt there is especially used N-benzylquinolinium hexafluoroantimonate.

When quaternary ammonium salts are used it is advantageous to use in addition a thermal free-radical former, for example pinacols and their ethers, esters or silyl derivatives. Such compounds are known and can be prepared in accordance with known procedures.

As thermal free-radical formers there are preferably used the pinacols, such as acetophenone pinacols or especially 1,1,2,2-tetraphenyl-1,2-ethanediol (benzopinacol).

As thermally activatable initiator there is especially used N-benzylquinolinium hexafluoroantimonate together with 1,1,2,2-tetraphenyl-1,2-ethanediol, preferably in a molar ratio of about 1:1.

The activation temperature of the cationic initiators is generally above room temperature, preferably in the range of from 60 to 180°C, especially from 90 to 150°C.

The amount of cationic initiator contained in the cationically curable epoxy resin is generally from 0.05 to 30 % by weight, preferably from 0.5 to 15 % by weight, based on the amount of cationically polymerisable epoxy resin.

Furthermore, the curable mixtures may comprise tougheners, for example core/shell polymers or the elastomers or elastomer-containing graft polymers known to the person skilled in the art as rubber tougheners.

Suitable tougheners are described, for example, in EP-A-0 449 776. They are preferably used in an amount of from 1 to 20 % by weight, based on the total amount of epoxy resin in the composition.

The curable mixtures may also comprise further fillers in addition to those mentioned above, for example metal powder, wood flour, glass powder, glass beads, semi-metal and metal oxides, such as SiO_2 (quartz sand, quartz powder, silanised quartz powder, fused silica powder, silanised fused silica powder), aluminium oxide, titanium oxide and zirconium oxide, metal hydroxides, such as $\text{Mg}(\text{OH})_2$, $\text{Al}(\text{OH})_3$, silanised $\text{Al}(\text{OH})_3$ and $\text{AlO}(\text{OH})$, semi-metal and metal nitrides, for example silicon nitride, boron nitrides and aluminium nitride, semi-metal and metal carbides (SiC and boron carbides), metal carbonates (dolomite, chalk, CaCO_3), metal sulfates (barite, gypsum), ground minerals, e.g. of hydromagnesite and huntite, and natural or synthetic minerals chiefly of the silicate series, e.g. zeolites (especially

molecular sieves), talcum, mica, kaolin, wollastonite and others. Preferred fillers are quartz powder, silanised quartz powder, aluminium hydroxide and aluminium oxide.

In addition to the additives mentioned above, the curable mixtures may also comprise further customary ingredients, e.g. antioxidants, light stabilisers, flame retardants, fillers containing water of crystallisation, plasticisers, dyes, pigments, fungicides, thixotropic agents, toughness improvers, antifoams, antistatics, lubricants, anti-settling agents, wetting agents and mould-release agents.

The compositions according to the invention can be produced in accordance with known methods using known mixing apparatus, for example stirrers (especially dispersers and Supraton® having a high shear gradient), kneaders, rollers or dry mixers. In the case of solid epoxy resins, the dispersing can also be carried out in the melt.

The curing of the mixtures according to the invention can be carried out in known manner in one or more stages. It is generally effected by heating the mixtures to temperatures of from 60°C to 200°C, especially from 80°C to 180°C.

The invention relates also to the crosslinked products obtainable by curing a composition according to the invention.

Surprisingly, in comparison with the corresponding unmodified systems (Comparison Example 1), the addition of the two chemically different siloxane components and the surface-active reagent in the compositions according to the invention results in virtually no impairment, or only slight impairment, of the mechanical and electrical properties of the products obtained therefrom.

The addition of silicones generally results in impairment of the adhesion properties, but the compositions according to the invention nevertheless unexpectedly exhibit good adhesion to metal, which is revealed by the fact that the good cantilever strength and pull-out strength values remain unchanged. Likewise, shaped articles encapsulated using a system according to the invention are surprisingly found to have a comparatively very good temperature change behaviour.

In comparison with unmodified systems, the invention offers the advantage that traces of the siloxanes used according to the invention are able to migrate onto any soiling present on the

fully cured material. As a result, an initially hydrophilic layer of dirt also becomes hydrophobic (hydrophobicity transfer), with the result that water more readily rolls away from the soiling in the form of beads and does not form a coherent conductive, and therefore harmful, dirt/water layer, as is the case with the unmodified system. This effect is even, surprisingly, very pronounced. The water runs off in a considerably better and more rapid manner. Surprisingly, the durability of this effect is also very good, that is to say the pronounced hydrophobicity transfer effect is retained even when the layer of dirt is repeatedly removed and reapplied.

Even in the case of only slightly soiled epoxy-resin-based insulators, there may be a loss of the original hydrophobicity and thus a rise in the surface conductivity, the reason being microdischarges which can be caused, for example, by individual raindrops on the insulator surface.

In comparison with unmodified systems (Comparison Example 1), a further advantage of the present invention is that, by means of the present systems, the hydrophobicity may surprisingly be regained after such an imposed loss, that is to say the original hydrophobicity is restored within a period ranging from hours to a few days ("recovery" effect).

As a result, the systems according to the invention with their excellent hydrophobicity properties in the form of a very good and at the same time long-lasting hydrophobicity transfer effect in combination with a very good recovery effect and good temperature change properties are by their nature suitable for use as insulating material for outdoor applications in fields of use where climatic conditions are difficult.

The compositions according to the invention are especially suitable as casting resins, casting compounds ("structural casting"), laminating resins, compression moulding compounds ("epoxy moulding compounds"), coating compounds and especially as electrical insulating compounds.

The invention relates also to the use of the compositions according to the invention as electrical insulating material.

In the following Examples, the following commercially available substances are used:

epoxy resin 1: liquid hexahydrophthalic acid diglycidyl ester;
epoxy content: 5.6 to 6.2 eq./kg ("CY 184", Ciba Spezialitäten Chemie)

ESO	epoxidised soybean oil; epoxy content: 4.10 to 4.20 eq./kg; ("Reoplast", Witco)
ELO	epoxidised linseed oil; epoxy content: 5.50 to 5.65 eq./kg; ("Merginat", Harburger Chemie)
hardener 1	hardener mixture of 70 parts by weight of hexahydrophthalic anhydride and 30 parts by weight of methylhexahydrophthalic anhydride
W 12:	untreated quartz powder (Quarzwerke Frechen)
W 12 EST:	quartz powder pretreated with epoxysilane (Quarzwerke Frechen)
polysiloxane 1:	OH-terminated polydimethylsiloxane having a viscosity of 5 Pa · s ("NG200-5000", Wacker)
polysiloxane 2:	mixture of linear OH-terminated ($\leq 40\%$) polydimethylsiloxanes and cyclic dimethylsiloxanes ($\geq 60\%$) having a viscosity of 5 to 20 Pa · s ("Dimethyl- methanolysat", GE-Bayer AG)
Fluorad:	non-ionic perfluorinated aliphatic polymeric ester (ethoxylated perfluorinated fatty acid) ("Fluorad FC 431", 3M)
BDMA	benzyl dimethylamine
1-MI	1-methylimidazole
Aerosil	hydrophilic, highly dispersed silicic acid ("Aerosil 200", Degussa)

Preparation Examples

Comparison Example 1:

In a mixing apparatus having a blade stirring mechanism, 1000 g of epoxy resin 1, 900 g of hardener 1, 5.0 g of BDMA and 2700 g of quartz powder W 12 EST are mixed together within a period of 30 min at 60°C using a mixer having a blade stirring mechanism and then briefly degassed at about 10 mbar. The composition is then cured for 6 hours at 80°C and for 10 hours at 140°C. The properties of the cured product are summarised in Table 1.

Invention Example 1:

In a mixing apparatus having a disperser disc, 9050 g of epoxy resin 1, 200 g of polysiloxane 1, 500 g of polysiloxane 2 and 100 g of Fluorad are mixed together at 3750 rev/min at room temperature in the course of 10 minutes. 150 g of Aerosil are then added to the mixture and mixing is carried out at 3750 rev/min at room temperature within a period of one hour, yielding a white, storage-stable emulsion.

1000 g of the resin premix so prepared are mixed with 814.5 g of hardener 1, 4.5 g of BDMA and 2578.1 g of quartz powder W 12 EST within a period of 30 min at 60°C using a mixer having a blade stirring mechanism and then briefly degassed at about 10 mbar. The composition is then cured for 6 hours at 80°C and for 10 hours at 140°C. The properties of the cured product are summarised in Table 1.

Invention Example 2:

In a mixing apparatus having a disperser disc, 6855 g of epoxy resin 1, 200 g of polysiloxane 1, 500 g of polysiloxane 2, 10 g of Fluorad, 1143 of ESO and 1143 g of ELO are mixed together at 3750 rev/min at room temperature in the course of 10 minutes. 150 g of Aerosil are then added to the mixture and mixing is carried out at 3750 rev/min at room temperature within a period of one hour, yielding a white, storage-stable emulsion.

1000 g of the resin premix so prepared are mixed with 806.6 g of hardener 1, 2.3 g of BDMA, 4.5 g of 1-MI and 2567.1 g of quartz powder W 12 EST within a period of 30 min at 60°C using a mixer having a blade stirring mechanism and then briefly degassed at about 10 mbar.

The composition is then cured for 6 hours at 80°C and for 10 hours at 140°C. The properties of the cured product are summarised in Table 1.

Invention Example 3:

In a mixing apparatus having a disperser disc, first of all 50 g of dibenzylidenesorbitol are dissolved in 9100 g of epoxy resin 1 at a maximum of 110° and the mixture is then cooled to room temperature. 200 g of polysiloxane 1, 500 g of polysiloxane 2 and 100 g of Fluorad are then added and the mixture is stirred at 1500 rev/min at room temperature for 15 minutes. 50 g of Aerosil are then added to the mixture and at room temperature the entire mixture is stirred at 1500 rev/min for a further one hour, yielding a white, storage-stable emulsion.

1000 g of the resin premix so prepared are mixed with 820 g of hardener 1, 4.5 g of BDMA and 3542 g of quartz powder W 12 EST within a period of 30 min at 60°C using a mixer having a blade stirring mechanism and then briefly degassed at about 10 mbar.

Application Example 1:

Pin insulators are produced by means of the pressure gelation process. For that purpose, the uncured mixtures, prepared according to Example 1 and analogously to Comparison

Example 1 but with a degree of filler of 66 % by weight, are injected into a metal mould which has been heated to 140°C and treated with parting agent. After gelation (after about 20 min), the casting is removed from the mould and post-cured for 10 hours at 140°C. The insulator produced from the composition according to the invention surprisingly has a cantilever strength of a level similar to that of the insulator produced from the analogous composition without silicone additives, while a comparison of the pull-out strengths shows that the material according to the invention still adheres very well to the insert (see Table 1).

Application Example 2:

The improved behaviour of the insulators produced using the system modified according to the invention in atmospheres having a high level of air pollution, especially the improved hydrophobicity properties, are demonstrated by the following tests:

2A: Hydrophobicity transfer effect

Specimens of Invention Examples 1 to 3 are tested to demonstrate the so-called "hydrophobicity transfer effect". For that purpose, artificial soiling is applied to four plates made of material prepared with the product according to Invention Examples 1 to 3 and Comparison Example 1 (prepared without the use of silicone-containing parting agents and cleaned with acetone after demoulding). For that purpose, quartz powder W 12 is applied to the plates from a vibrating apparatus in an amount per unit area sufficient to produce a foreign layer 0.5 mm thick when the powder is smoothed with a ruler or the like. In order to test whether or not the material then transfers the hydrophobicity to the quartz layer, which is actually hydrophilic, at specific time intervals a 30 µl water droplet is applied to the foreign layer using a pipette, the behaviour of the droplet is observed and classified in accordance with the following scheme:

Transfer state system (TS)

TS	Properties	Level specimen	Specimen inclined at 45°	Specimen initially level, then inclined at 45°
1	No hydrophobicity transfer effect (HTE)	Droplet is immediately absorbed		
1.5		Droplet is absorbed within 2 minutes		
2	weak HTE	Droplet remains stable for 2 minutes		
2.5			Droplet forms "nose shape"	
3	moderate HTE		Runs off with a large amount of foreign layer material	Droplet remains stable on tilting
3.5			Runs off with a large amount of foreign layer material	Droplet forms "nose shape" on tilting
4	good HTE			Droplet runs off on tilting, leaving a clearly visible track
4.5				Droplet leaves a slight track on tilting
5	excellent HTE	Droplet runs off without foreign material and "dances about" when specimen is tilted slightly		

Transfer state system: 500 µm thick quartz powder layer (quartz powder W12, Quarzwerke Frechen), Application 30 µl water droplet

2B: Demonstration of the "recovery" effect by means of a plasma test

In order to demonstrate the recovery effect, the state of hydrophobicity is determined (see 2B1). Then a state of hydrophilicity is imposed by the use of a plasma (see 2B2). After the plasma treatment, which is intended to bring about loss of hydrophobicity, the state of the surface is again investigated at various time intervals (immediately, after one hour (h) and one day (d)). A recovery effect is present when a specimen passes from a hydrophilic state (in about class 5 to 7) to a hydrophobic state (in about class 1 to 4), that is to say when the state prior to the plasma treatment has approximately been restored. The results are summarised in Table 1.

2B1: The hydrophobicity state of the specimens at any given time is determined as follows: a vertically arranged specimen surface about 100 cm² in size is sprayed with water 20 times (once per second) from a distance of about 25 ± 10 cm using a spray bottle. After a further

10 seconds the specimen is examined and the state of the surface is classified in accordance with the following scheme:

Classification of the hydrophobicity state in the spraying test

Class HC	Properties	Description of the effects
1	Excellent surface hydrophobicity	Only discrete droplets, contact angle for the majority of droplets is $> 80^\circ$
2	Very good surface hydrophobicity	Only discrete droplets, contact angle for the majority of droplets is $> 50^\circ$ but $< 80^\circ$
3	Good surface hydrophobicity	Only discrete droplets, contact angle for the majority of droplets is $> 20^\circ$ but $< 50^\circ$
4	Moderate surface hydrophobicity	Discrete droplets and discrete wetted areas, the size of the individual wetted areas is $< 2 \text{ cm}^2$ and the total wetted area is $< 90\%$
5	Low surface hydrophobicity	Some discrete wetted areas, areas $> 2 \text{ cm}^2$, the size of the total wetted area is $< 90\%$
6	Low hydrophilicity	$> 90\%$ of the total area is wetted but some unwetted sites can be identified
7	Very hydrophilic surface	Continuous film of water over the entire area tested

2B2: A loss of hydrophobicity, i.e. hydrophilicity, is imposed by means of a plasma treatment. For that purpose, the test plates, which have dimensions of $10 \times 10 \times 0.4 \text{ cm}^3$, are placed in a plasma chamber type 440 (Technics Plasma GmbH) and exposed to the following conditions: plasma treatment time: 2 min, pressure: 2 to 3 mbar, gas: oxygen, output: 200 Watt. The treatment results in the loss of hydrophobicity (see Table 1).

Comparative Application Examples:

Three Comparison Examples are prepared in principle analogously to Invention Example 1. Unlike Invention Example 1, in which polysiloxanes 1 and 2 and a surface-active reagent are used at the same time, in each Comparison Example only one additive is used. The individual compositions and the properties of the cured products are summarised in Table 1.

Table 1

Comparison and Invention Examples	CE 1	IE 1	IE 2	IE3	CE 2	CE 3	CE 4
Composition [parts by weight]							
epoxy resin 1	100	90.5	68.55	91	97	94	99
ESO			11.43				
ELO			11.43				
polysiloxane 1		2	2	2	2		
polysiloxane 2		5	5	5		5	
Fluorad		1	0.1	1			1
BDMA	0.5	0.45	0.23	0.45	0.49	0.47	0.5
1-MI			0.45				
Aerosil		1.5	1.5	0.5	1	1	
dibenzylidenesorbitol				0.5			
hardener 1	90	81.45	80.66	82	87.3	84.6	89.1
W 12 EST	270	257.8	254.6	354.2	266.1	262.3	268.7
Stability of the emulsion (resin components + Aerosil)	one phase	good	good	good	poor	poor	one phase
Tg (DSC) [°C]	110	110	109	110			
tangent δ (50 Hz) [%] at 24°C	1	0.5	0.2				
at 100°C	2	1.6	1.7				
temperature at 8% loss [°C]	125	127	123				
tensile strength [MPa]	90	86	75				
elongation at break [%]	1.4	1.4	1.3				
bending strength [MPa]	125	137	127				
outer fibre strain [%]	1.3	1.6	1.7				
elasticity modulus in flexure [MPa]	10500	9785	8813				
critical stress intensity factor K _{1C} [MPa · (m) ^{1/2}]	2.25	2.24	2.12				
breaking energy G _{1C} [J/m ²]	485	465	465				
Application Examples (AE)	AE 2	AE 2	AE 2	AE2	AE 2	AE 2	AE 2
transfer state [TS] after 50 h	1	3.5	3.5	4.5	2.5		1
after 500 h	1	4	4	4.5	3.5		1
after 500 h in 2nd application	1	4	4	4.5			
hydrophobicity class [HC] before plasma	3	2	3		3	2	2
immediately after plasma	7	7	7		6	6	6
1 h after plasma	7	2	6		5	5	7
1 d after plasma	6	1	3		5	5	5
Application Examples (AE)	AE 1	AE 1	AE1	AE3			
filler content [%]	66	66	66	66			
cantilever strength [N]	6125	5972	5509	crack test			
pull-out strength [N]	71.6	64.8	62				

- DSC (Differential Scanning Calorimetry) carried out using a TA 4000 apparatus (Mettler)
- electrical values (tangent δ) according to DIN 53483, measurement frequency 50 Hz
- tensile strength and breaking strength according to ISO R527
- bending strength, outer fibre strain and elasticity modulus in flexure according to ISO 178
- K_{1C} and G_{1C}: double torsion test

Table 1 shows:

1) The properties of an unmodified reference material:

No hydrophobicity transfer is found, but good surface hydrophobicity. After the loss thereof (by means of plasma), however, the surface hydrophobicity is not restored.

2) The properties of the modified compositions according to the invention:

Example 1 very quickly exhibits a good hydrophobicity transfer effect, as it does also in the second application of the foreign layer. The material is very hydrophobic in the starting state and very quickly regains hydrophobicity after the imposed loss by means of the plasma and therefore exhibits an excellent recovery effect.

The second Example exhibits virtually the same hydrophobicity transfer effect as Example 1, but the surface hydrophobicity is not as good. After the loss thereof (by means of plasma), hydrophobicity is restored, but less quickly than in Example 1. The third Example exhibits a very good hydrophobicity transfer effect which is established rapidly.

3) The further Comparison Examples show that the recovery effect cannot be influenced by the individual additives alone. In all cases the hydrophobicity is not regained after imposed loss.

Application Example 3 (comparative cracking test):

Shaped steel articles are encapsulated either with casting resin system 3 according to the invention (see IE3) or with an unmodified casting resin system and the resin is cured. Then in a cycle having defined time units, the shaped articles are exposed to specific periods at steadily increasing temperatures and after each period are examined for any crack formation which may have occurred.

Preparation of the unmodified comparison mixture (analogously to Comparison Example 1): In a mixing apparatus having a blade stirring mechanism, 1000 g of epoxy resin 1, 900 g of hardener 1, 5.0 g of BDMA and 3780 g of quartz powder W 12 EST are mixed together in the course of 30 min at 60°C using a mixer having a blade stirring mechanism and then briefly degassed at about 10 mbar.

The shaped articles are subjected to the cracking test described below:

Cracking test

In an aluminium casting mould having depressions, batches of 20 steel test specimens of the casting resin systems to be compared are produced by means of the APG (Automatic Pressure Gelation) process. In that process, the liquid resin mixture is heated to 40-60°C and stirred *in vacuo*. The resin mixture is then injected into the casting mould (which has been heated to 140-150°C) under a slight pressure of 2-5 bar. While the pressure is maintained, the resin system is gelled in the casting mould within a period of a few minutes, each test specimen produced thus having an enclosed steel body. After gelation, the test specimens are removed from the mould and post-cured for 10 hours at 140°C. The test specimens are then exposed to a specific temperature profile. The temperature profile consists of a series of cycles having an upper temperature limit of 25°C, at which each specimen is also examined for any crack formation, whereas the lower temperature limit becomes lower with every cycle. In each cycle, the specimens are rapidly brought to the respective lower or upper temperature limit, and maintained at that particular limit temperature for a few hours. The cycle in which a specimen exhibits the first cracks is noted. The average cracking temperature of a resin system is determined from the frequency distribution of crack formation per cycle.

The results of the comparative cracking test of Application Example 3 are listed in the following Table:

Temperature [°C] / duration [hours]	IE (20 specimens) cracked specimens	CE (20 specimens) cracked specimens
25 / 8	0	0
-10 / 8 + 25 / 8	0	17
-20 / 16 + 25 / 8	1	2
-40 / 16 + 25 / 8	4	1 (20)
- 60 / 16 + 25 / 8	7	-
- 80 / 16 + 25 / 8	5	-
- 100 / 16 + 25 / 8	3 (20)	-

In the case of the comparison system, the average cracking temperature is calculated to be -12°C, whereas it is -66°C for the system according to the invention. The systems according

to the invention, in addition to their hydrophobic behaviour, therefore surprisingly also exhibit an appreciably better temperature change behaviour in comparison with an unmodified system.

Patent claims

1. A composition comprising

- (a) an epoxy resin,
- (b) an OH-terminated polysiloxane,
- (c) a cyclic polysiloxane and
- (d) a non-ionic, fluoroaliphatic surface-active reagent.

2. A composition according to claim 1, comprising,

based on the total composition (a), (b), (c) and (d),

from 77.0 to 97.99 % by weight component (a),

from 1.0 to 10.0 % by weight component (b),

from 1.0 to 10.0 % by weight component (c) and


from 0.01 to 3.0 % by weight component (d),

the sum of components (a), (b), (c) and (d) being 100 % by weight.

3. A composition according to claim 1, comprising as component (a) a cycloaliphatic epoxy resin or an epoxidation product of a natural unsaturated oil or a derivative thereof.

4. A composition according to claim 1, comprising as component (a) hexahydrophthalic acid diglycidyl ester and 3,4-epoxycyclohexylmethyl 3',4'-epoxycyclohexanecarboxylate as well as epoxidised soybean oil or epoxidised linseed oil.

5. A composition according to claim 1, comprising as component (b) a polysiloxane of formula I

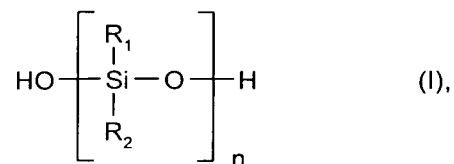


wherein R₁ and R₂ are each independently of the other C₁-C₁₈alkyl, C₅-C₁₄aryl or C₆-C₂₄-aralkyl and n is an average value of from 3 to 60.

6. A composition according to claim 5, comprising as component (b) a polysiloxane of formula I wherein R_1 and R_2 are each independently of the other methyl, ethyl or phenyl.

7. A composition according to claim 5, comprising as component (b) a polysiloxane of formula I wherein R_1 and R_2 are methyl.

8. A composition according to claim 1, comprising as component (c) a cyclic polysiloxane of formula II

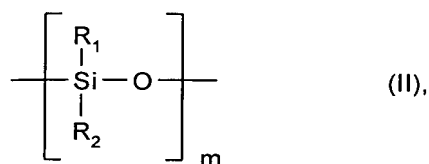


wherein R_1 and R_2 are each independently of the other C_1 - C_{18} alkyl, C_5 - C_{14} aryl or C_6 - C_{24} -aralkyl and m is an integer from 3 to 12.


9. A composition according to claim 8, comprising as component (c) a cyclic polysiloxane of formula II wherein R_1 and R_2 are each independently of the other methyl, ethyl or phenyl and m is an integer from 3 to 8.

10. A composition according to claim 8, comprising as component (c) octamethylcyclotetrasiloxane, decamethylcyclopentasiloxane, dodecamethylcyclohexasiloxane or a hydrolysate of dimethyldichlorosilane.

11. A composition according to claim 11, comprising as component (d) a non-ionic, fluoroaliphatic surface-active reagent of formula



or



wherein $m = 1$ to 200, R_f is a linear or branched perfluorinated alkyl having from 2 to 22 carbon atoms and $R = \text{H}$, C_1 - C_6 alkyl or R_f .

12. A composition according to claim 11, comprising as component (d) compounds of formula (III) or (IV) in which the molecular mass according to the theoretical empirical formula is from 300 to 8000.

13. A composition according to claim 12, comprising as component (d) 1,1,2,2-tetrahydro-perfluorooctanol or $R_f\text{-COO}-(\text{CH}_2\text{CH}_2\text{O})_m\text{-R}$, wherein R_f is a linear perfluorinated alkyl having from 16 to 18 carbon atoms, $m = 110\text{-}130$ and $R = \text{H}$.

14. A composition according to claim 1, additionally comprising as further component (g) emulsifiers or thickeners.

15. A composition according to claim 14, comprising as component (g) from 0.01 to 3.5 % by weight, based on the sum of components (a) to (d), highly dispersed, hydrophilic, untreated silicic acid.

16. A composition according to claim 1 or 14 or 15, additionally comprising a curing agent.

17. A composition according to claim 16, wherein the curing agent is selected from a polycarboxylic anhydride (e) or from a polycarboxylic anhydride (e) together with an accelerator (f).

18. A composition according to claim 16, wherein the curing agent is an initiator system for the cationic polymerisation.

19. A composition according to any one of claims 1 or 14 to 18, which comprises fillers.

20. A composition according to claim 19, which comprises as filler quartz powder, silanised quartz powder, aluminium hydroxide or aluminium oxide.

21. A crosslinked product obtainable by curing a composition according to any one of claims 1 to 20.

22. An electrical insulating material according to claim 21.

Abstract of the Disclosure

A composition comprising

- (a) an epoxy resin,
- (b) an OH-terminated polysiloxane,
- (c) a cyclic polysiloxane and
- (d) a non-ionic, fluoroaliphatic surface-active reagent,

exhibits excellent hydrophobicity properties and can be used as electrical insulating material.